


PRODUCT INTRODUCTION

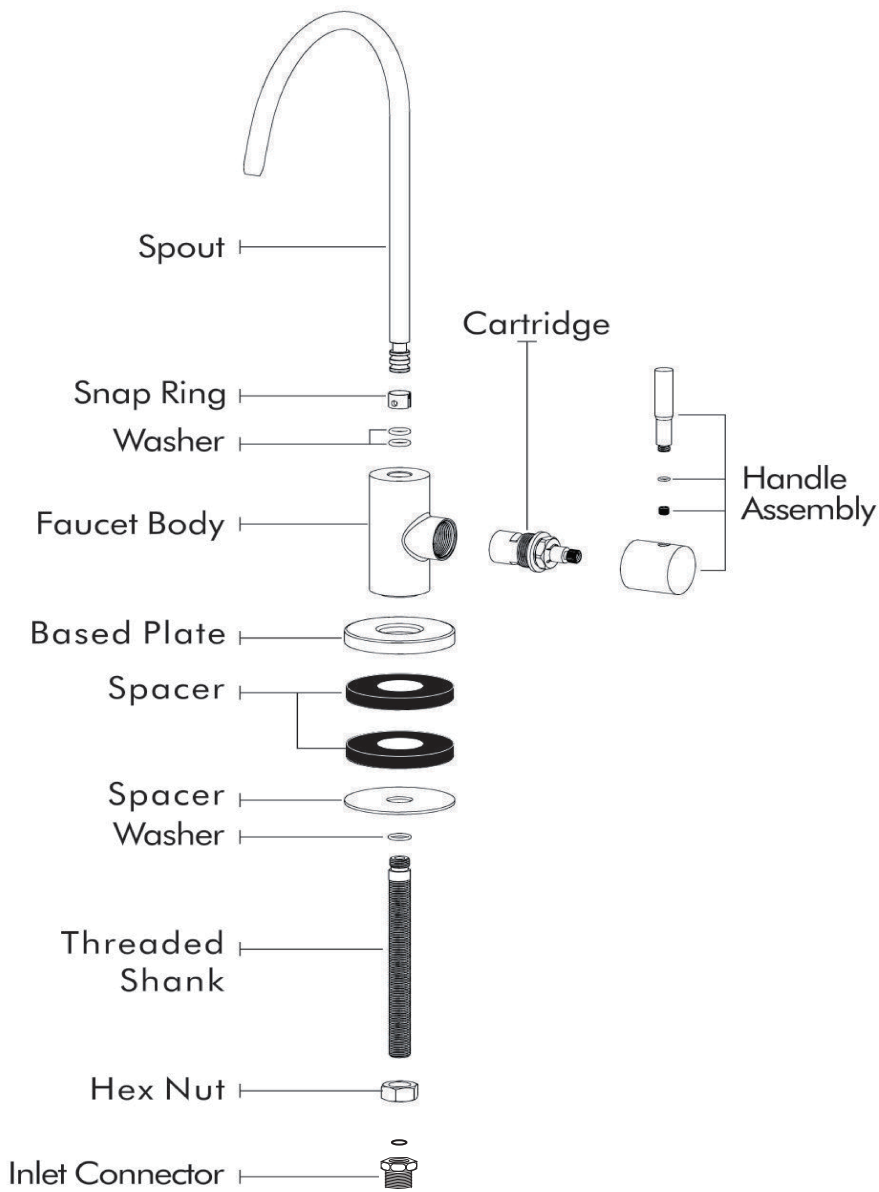

WARNING

To reduce the risk of injury or property damage, read and follow all of the installation instructions before installing this product and wear safety goggles. This product must be installed in accordance with all state and local plumbing and building codes. Call a professional if you are uncertain about installing this product properly.


WORKING CONDITIONS

Environment Temperature: 5°C-49°C (41°F-120°F)
Inlet Water Temperature: 5°C-70°C (41°F-158°F)
Water Pressure: 0.15MPa-0.50MPa
Connection Size: 9/16-24UNEF
Notice : not responsible for damage to the faucet caused by extreme weather, which causes inlet water temperatures below 5°C (41°F) or above 70°C (158°F).

PRIOR TO INSTALLATION

Recommended pre-drilled countertop hole size:
13-15mm(33/64-19/32 in)
Pre-drilled countertop hole size requirement:
min. 13 - max. 45mm(33/64-1 49/64 in)

HELPFUL TOOLS

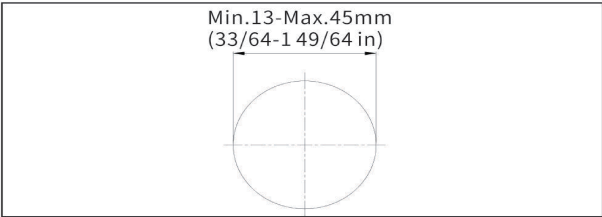

FAUCET INSTALLATION

Before installation, you should ideally flush your plumbing pipes to clear any debris or sediment by letting the water run for a few minutes. Next, turn off your sink's water supply.

