

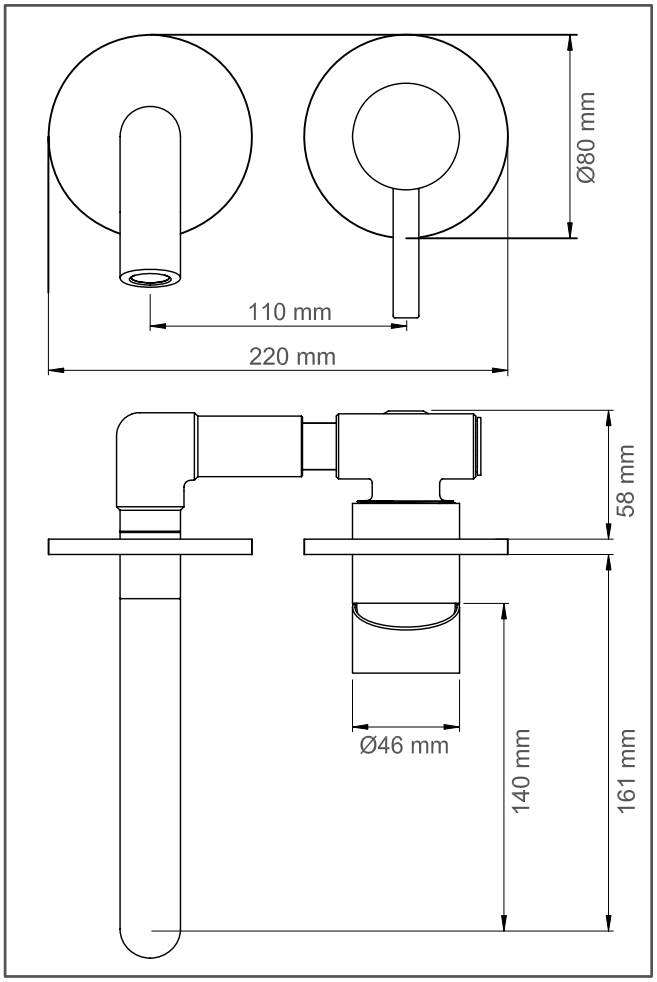


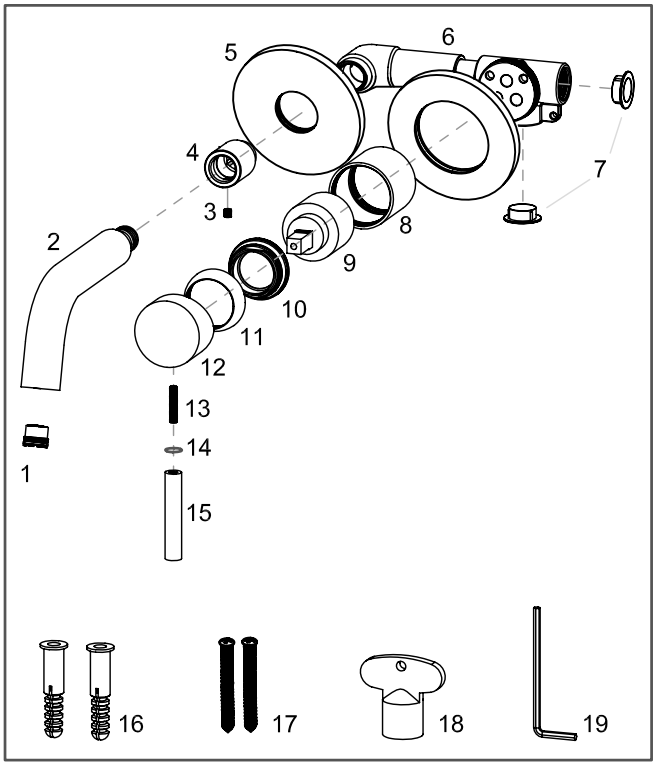


Product explosion map

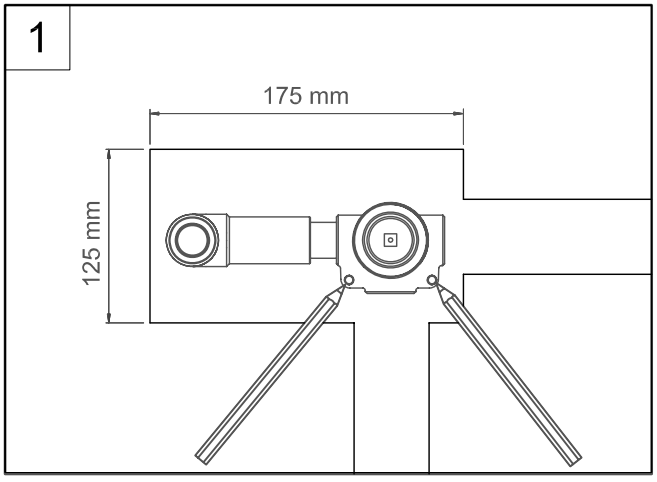


Installation steps:

1. Open a rectangular groove with a length of 175mm, 125mm wide and a depth of 55-60mm on the wall, and make the bottom of the groove smooth.
Put the product into the center of the groove, and mark it at the position of the installation hole.

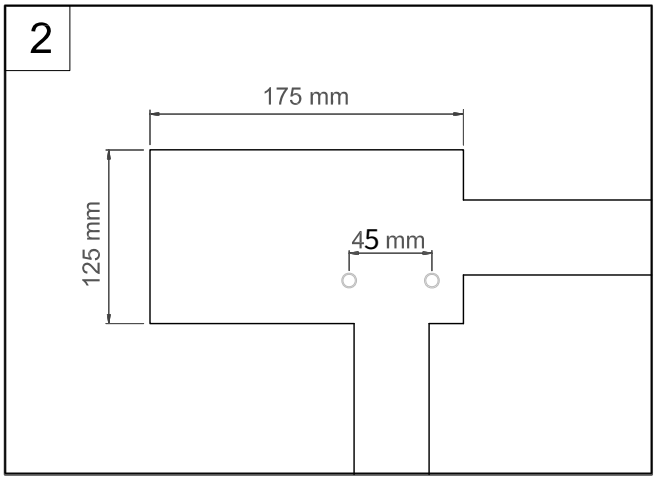


2. The hole size is 6mm, the center of the two holes is 45mm and the depth is 35mm; knock the 16 expansion plastic in the explosion diagram into the two holes.


3. Put the product into the wall and fix the product with 17 screws in the explosion diagram; connect with the hot and cold water pipes according to the drawing.

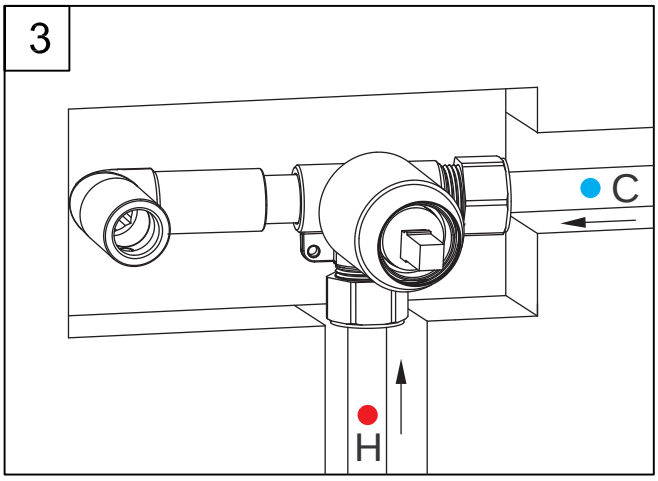

4.After debugging, paste the ceramic tile, and then install the panel in the corresponding hole position;

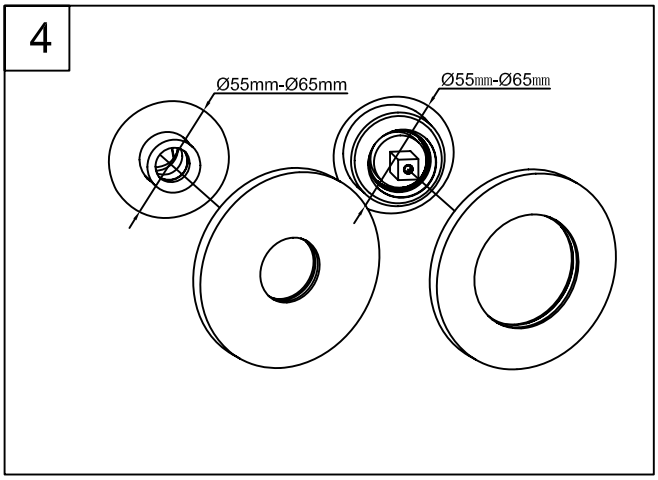

5.Finally, install the outlet pipe assembly back to the original position and lock it with the screw; return the handle to the valve core according to the drawing, and screw it up with the screw;

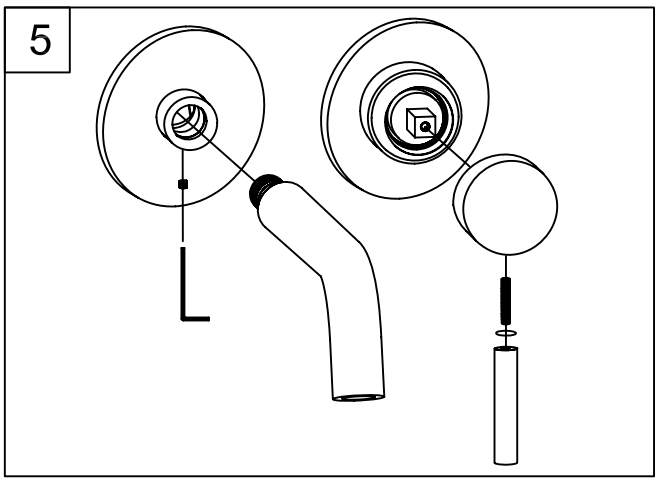

Note: Before installation, remove the outlet pipe assembly and the handle assembly and place it on one side. Do not lose it!!!

Routine Maintenance:

We do not recommend that you use any household cleaner to clean the product. Because the long-term use of these cleaners will make the product surface corrosion, must be cleaned with soapy water and water, and wiped with a soft cloth.